
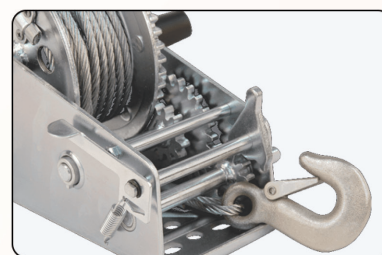


BW Type Boat Winch

Features:

- It is mainly used for parallel towing and moving items, especially for towing yachts and boats, but also for industrial and agricultural operations.
- The product is divided into two types of connection: steel wire rope and webbing.
- It can also be supplied to customers without steel wire rope and webbing.
- According to the size of the working load and the operator's ability to exert force, the transmission device with a working load below 1800LBS is a singlestage gear transmission, and the transmission device with a working load above 1800LBS is a dual-stage gear transmission.
- The surface treatment is electroplated white zinc, and electroplated color zinc or black electrophoresis can also be performed according to customer requirements.

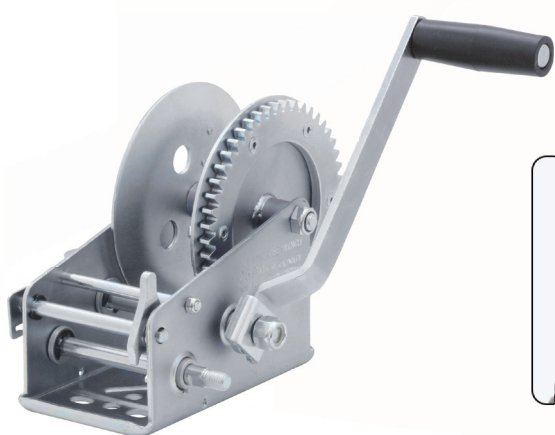

| Model | Rated Pull 1st Layer(lbs) | Speed Ratio | Wire Rope (ΦmmxLm) | Handle Length (mm) | Drum-Hub Dia(mm) | Net Weight(kg) | Pcs/Pack |
|-------|---------------------------|--------------|--------------------|--------------------|------------------|----------------|----------|
| BW06 | 600 | 3.1:1 | 4mmx8m | 175 | 16 | 1.8 | 6 |
| BW08 | 800 | 3.1:1 | 4mmx8m | 200 | 16 | 2 | 6 |
| BW10 | 1000 | 4.1:1 | 4mmx10m | 200 | 18 | 2.7 | 6 |
| BW12 | 1200 | 4.1:1 | 4mmx10m | 225 | 18 | 2.75 | 6 |
| BW14 | 1400 | 4.1:1 | 4.5mmx10m | 225 | 18 | 2.85 | 6 |
| BW16 | 1600 | 4.3:1 | 4.5mmx10m | 225 | 21 | 3.25 | 4 |
| BW18 | 1800 | 4.1:1&9.8:1 | 4.5mmx10m | 250 | 21 | 4 | 4 |
| BW20 | 2000 | 4.1:1&9.8:1 | 4.5mmx10m | 250 | 21 | 4.3 | 4 |
| BW25 | 2500 | 5.1:1&12.2:1 | 5mmx10m | 250 | 21 | 4.5 | 4 |
| BW30 | 3000 | 5.1:1&12.2:1 | 5mmx10m | 275 | 21 | 5 | 4 |

• Note:We reserve the right to change parameters without prior notification.