


VD Type Chain Block



Features:

- All Steel Construction-Impact resistant covers that provide durability and protection.
- Double pawl and double guide rollers enhance performance,safety and reliability.
- Unique curling design-This feature enables the hand chain to successfully feed directly into the wheel sprocket from many directions and angles.
- Grade 80 Load Chain-Grade 80 black oxide coated load chain for durability.
- Forged alloy Steel Hooks-Industrial rated hooks rotate 360 degrees for easy rigging. -Hooks slowly stretch to indicate an overload situation increasing jobsite safety.
- Sealed roller bearings-Greatly improving performance and serve life of the product.
- Certification-Load tested to 150% of capacity with certificate.

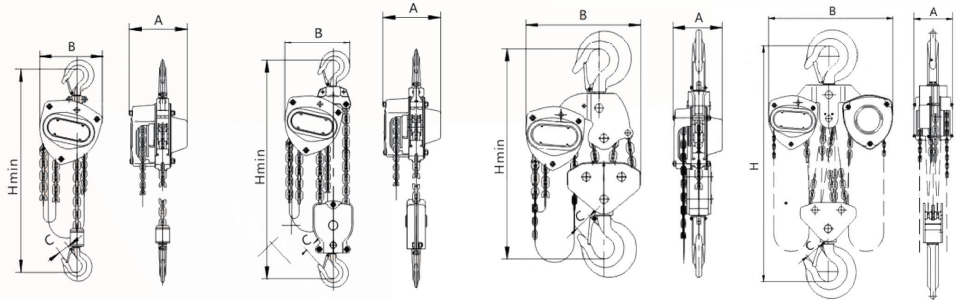

Model	Capacity (t)	Standard Lift (m)	Test Load (t)	Effort required to lift max load(N)	No.of falls of load chain	Load chain diameter (mm)	Dimension(mm)				Net Weight (kg)
							A	B	H	C	
VD00525	0.5	2.5	0.75	240	1	5	132	148	345	28	11
VD01003	1	3	1.5	250	1	6	151	172	376	32	12.5
VD01503	1.5	3	2.25	265	1	7.1	173	196	442	36	17.8
VD02003	2	3	3	335	1	8	175	210	470	36	19.5
VD03003D	3	3	4.5	363	1	10	176	230	565	46	29
VD03003S	3	3	4.5	265	2	7.1	173	226	490	46	23.5
VD05003	5	3	7.5	360	2	9	185	280	688	46	41.3
VD10003	10	3	15	380	4	9	189	463	765	57	78.5
VD20003	20	3	30	380x2	8	9	189	630	890	82	193
VD30003	30	3	45	380x2	12	9	330	670	1000	106	220

• Note:We reserve the right to change parameters without prior notification.