

## Shackle


### Features:

- Designed for Grade 80 alloy steel lifting chain and wire rope
- Material: High Tensile Drop Forged Alloy Steel
- Construction: Quenched and Tempered
- Safety Factor 4:1



### Model: GUB


Model	Size (inch)	W.L.L (t)	Dimension(mm)									N.W kg
			H	D	C	d	E	A	G	L	H1	
GBU12	1/2	2	20.6	15.8	47.8	12.7	33.3	31.0	58.7	54.5	70.0	0.30
GBU16	5/8	3-1/4	27.0	19.0	60.0	16.0	43.0	40.0	75.0	68.0	87.5	0.63
GBU19	3/4	4-3/4	32.0	22.0	71.5	19.0	51.0	48.0	89.0	81.0	101.0	1.02
GBU22	7/8	6-1/2	37.0	25.0	84.5	22.0	58.0	54.0	102	95.0	116.0	1.51
GBU26	1	8-1/2	43.5	28.0	96.3	26.5	68.5	60.0	121.5	106	135.5	2.27
GBU29	1-1/8	9-1/2	48.0	32.0	109.0	29.0	75.0	68.0	133	121.5	145	3.38
GBU32	1-1/4	12	53.0	35.0	120.5	32.0	84.0	76.0	148	134	160	4.60
GBU35	1-3/8	13.1-2	59.0	38.0	134.0	35.0	94.0	84.0	164	148	178	5.84
GBU38	1-1/2	17	62.0	42.0	148.5	38.0	99.0	92.0	175	166	194	7.80
GBU45	1-3/4	25	75.0	50.0	178.0	45.0	128	106	218	192	228	12.33
GBU52	2	35	84.0	56.0	197.0	52.0	148	122	252	212	255	18.54
GBU63	2-1/2	55	107	70.0	269.5	63.5	186	145	313	284	317	37.60

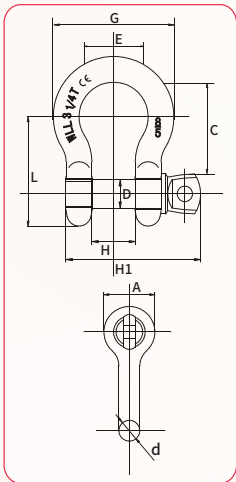

### Model: GBB



Model	Size (inch)	W.L.L (t)	Dimension(mm)									N.W kg
			H	D	C	d	E	A	G	L	H1	
GBB12	1/2	2	20.6	15.8	47.75	12.7	33.3	31.0	68.35	58.7	74.50	0.35
GBB16	5/8	3.1/4	27.0	19.0	60.00	16.0	43.0	40.0	85.50	75.0	93.00	0.67
GBB19	3/4	4.3/4	32.0	22.0	71.50	19.0	51.0	48.0	101.5	89.0	107	1.12
GBB22	7/8	6.1/2	37.0	25.0	84.50	22.0	58.0	54.0	119.5	102	121	1.64
GBB26	1	8.1/2	43.5	28.0	96.25	26.5	68.5	60.0	136.7	121	137	2.42
GBB29	1.1/8	9.1/2	48.0	32.0	109	29.0	75.0	68.0	154	133	145	3.56
GBB32	1.1/4	12	53.0	35.0	120.5	32.0	84.0	76.0	170	148	167	4.91
GBB35	1.3/8	13.1/2	59.0	38.0	134	35.0	94.0	84.0	188	164	185	6.17
GBB38	1.1/2	17	62.0	42.0	148.5	38.0	99.0	92.0	207.5	175	198	8.47
GBB45	1.3/4	25	75.0	50.0	178	45.0	128	106	248	218	227	13.26
GBB52	2	35	84.0	56.0	197	52.0	148	122	277	252	250	19.53
GBB63	2.1/2	55	107	71.0	269.5	66.0	186	145	368	318	299	38.56
GBB76	3	85	127	80.0	330.5	76.0	200	165	587.5	365	92	63.11

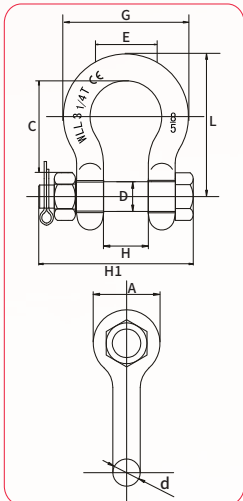

• Note: We reserve the right to change parameters without prior notification.