


HAND CHAIN HOIST

VL Type Lever Block



Features:

- The adoption of low-alloy structural steel plate, safe, reliable and durable.
- G80 high strength load chain, high safety factor and long service life..Steady rotation, high efficiency, small lever force.
- Double pawl keep safe and reliable.
- The products have been widely used in nuclear power, thermal power transmission and transmission etc.
- Special separation block design, free to pull the lifting chain, easy to operate
- Optimized design of gear transmission mechanism and speed ratio, the product can run without load

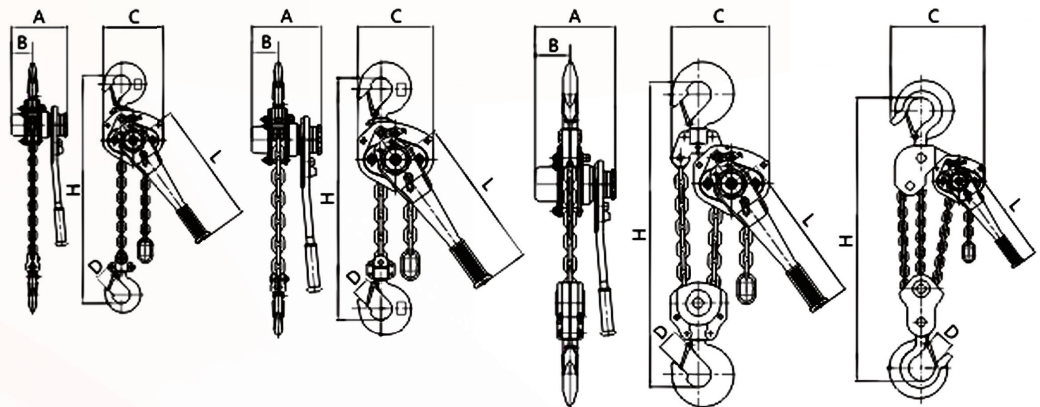

Model	Capacity (t)	Standard Lift (m)	Test Load (t)	Effort required to lift max load(n)	No.of falls of load chain	Load chain diameter (mm)	Dimension(mm)						Net Weight (kg)
							A	B	C	D	H	L	
VJ0715	0.75	1.5	1.125	230	1	6.3	150	55	128	32	303	254	6.6
VJ1515	1.5	1.5	2.25	295	1	7.1	165	64	149	36	365	366	11
VJ3015	3	1.5	4.5	414	1	9	195	85	182	46	485	366	17
VJ6015	6	1.5	9	430	2	9	195	85	240	46	600	366	27.5
VJ9015	9	1.5	13.5	430	3	9	195	85	335	57	700	366	47

• Note:We reserve the right to change parameters without prior notification.